




Kanglida Electronic Power CO.,LTD

12V7AH-SC




• Outer dimensions(mm)

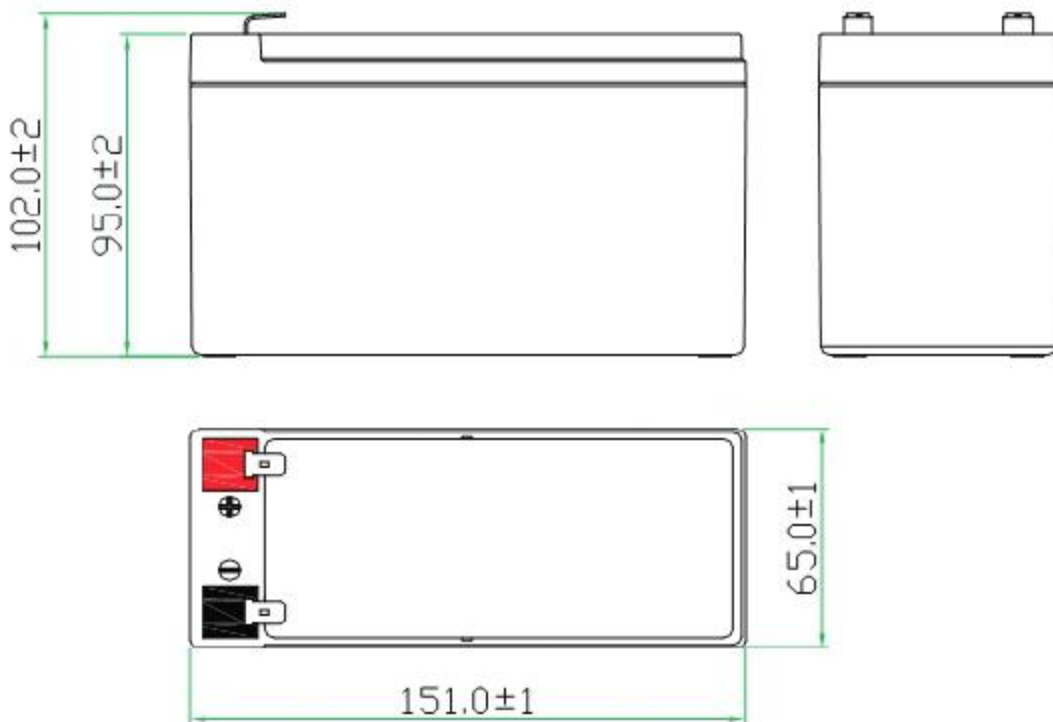

Specification


Nominal Voltage		12v		Rated capacity (20 hour rate)	7ah
Dimensions ±1mm	Length Width Height Total height (With terminals)	151mm	5.94inches	Weight approx:	2050g
		65mm	2.56inches		
		95mm	3.74inches	Standard Terminal	F1
		102mm	4.01inches	Optional Terminal	F2

F1 Terminal (Brass Coated with Silver)




Photo

F2 Terminal (Brass Coated with Silver)



Photo


• Discharge Characteristics (25°C/77°F)

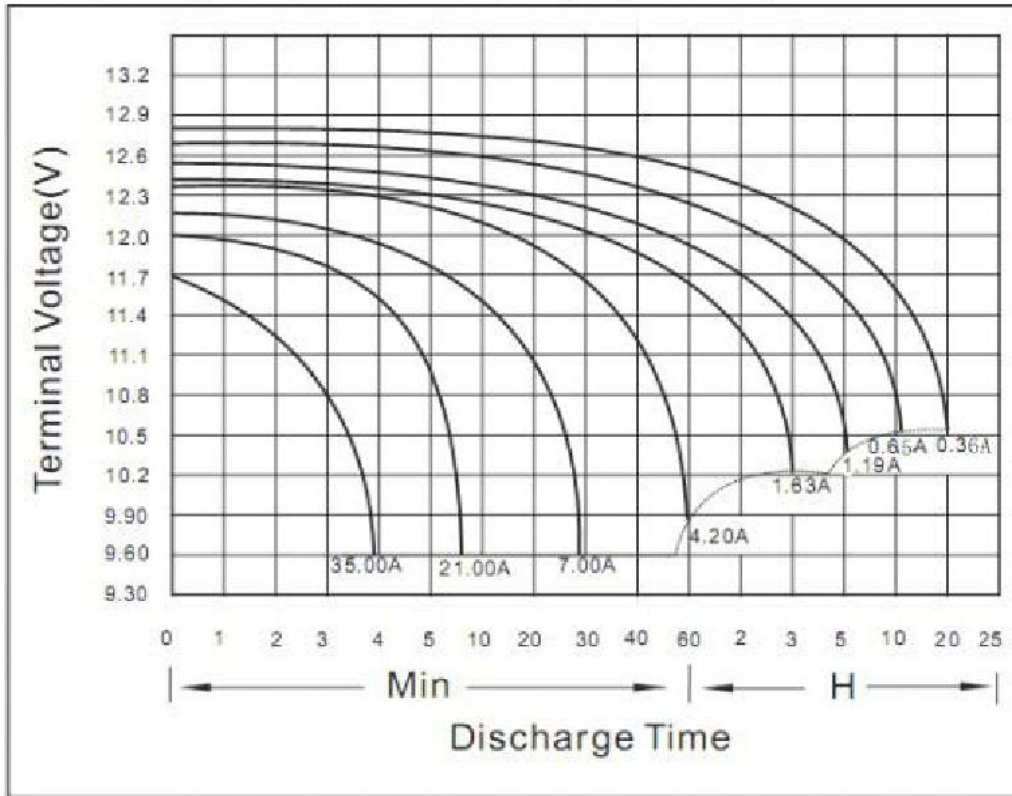

Electrical Specifications

Capacity 77°F (25°C)	20 hour rate(360mA)	7.2AH	Internal Resistance		25m Ω
	10 hour rate(650mA)	6.5AH			
	5 hour rate(1190mA)	5.95AH	Full charged battery 77°F (25°C)		
	1 hour rate(4200mA)	4.2AH			
Capacity Affected by Temperature (20 hour rate)	104°F (40°C)	102%	Self-Discharge 77°F(25°C)	Capacity after 1 month storage 98%	
	77°F (25°C)	100%		Capacity after 3 month storage 91%	
	32°F (0°C)	80%		Capacity after 6 month storage 82%	
	5°F (-15°C)	50%		Capacity after 12 month storage 65%	
Charge Constant Voltage	Cycle use:Initial Charging Current less than 2.25A; Voltage 14.40~15.00V 77°F (25°C) Standby use:Voltage 13.50~13.80V 77°F (25°C)				

• Discharge Characteristics(0°C/32°F–40°C/104°F)

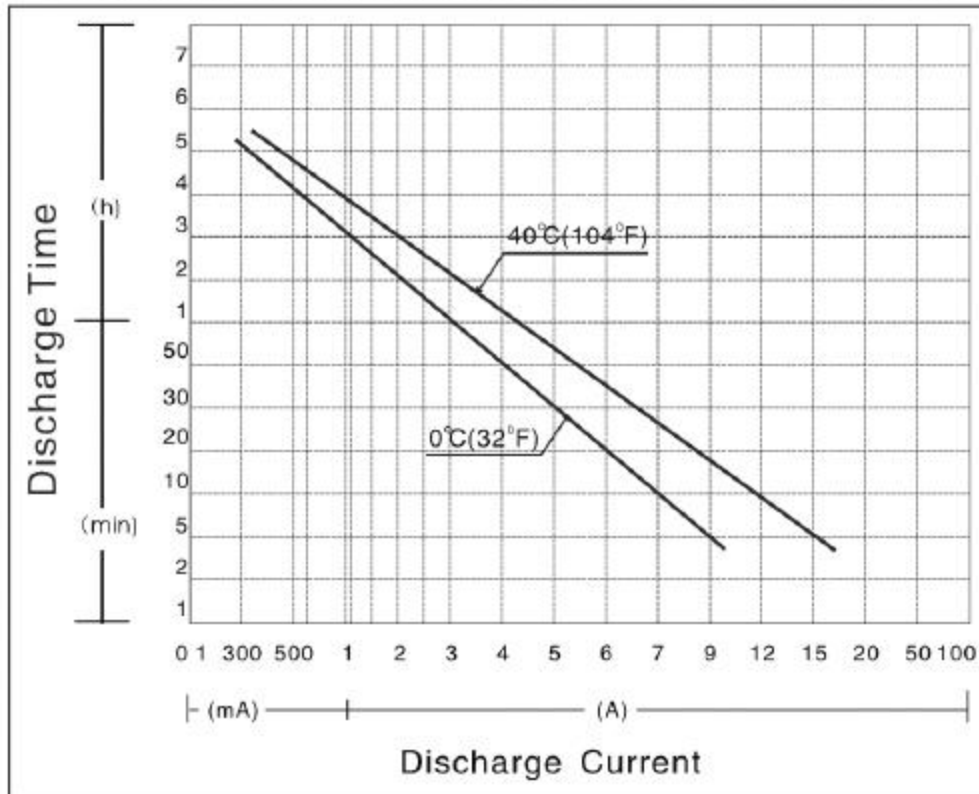

Maintenance and Attention Matters:

1. Battery is not allowed close to Tepid source or basked under the sun for a long time.

2. No charge in the obturate container

3. No short circuit. Battery should be stored full of electronic when not in need, and the battery should be charged every three months in order to avoid the irreversible sulphation. When battery case bursts or electrolyte leaks, battery should be changed lest the acid corrosion.

4. No battery in environment with the acid gas.

5. When battery is used as the backup battery, be careful and check it at regular time to avoid the damage battery. Especially the battery beyond one year should be checked in time, and change the less capacity and scrapped battery. (some batteries maybe have voltage but no current; some batteries maybe have current but no voltage; some maybe have both but less capacity: all these conditions cannot meet the work, reach the power-on time. Do not for the small battery, cause the huge losses)

6. Forbidden battery in the fire, otherwise it will cause an explosion.

7. When battery cracks or electrolyte leaks, please use cotton cloth clear it. When skin contacts to the liquid, please wash with fresh water immediately. See doctor if serious.

8. No wash on the surface of the battery with the organic solution.